

UNIDIALER

Automatic Dialer - Model 2300-700

PROGRAMMING INSTRUCTIONS

1. Opening the Unit

- a. Remove the cover from the Unidialer by loosening the screws at the four corners of the Unidialer housing.

2. How to begin Programming

- a. Inside the Unidialer housing you will find the programming keypad for the Unidialer. Begin the programming procedure with the programming telephone handset hung up.

The following steps can be done in any order .

3. Standard Telephone Line Programming

- a. Press and hold START
- b. Lift the telephone handset (while still holding down START)
- c. Release START
- d. Press START
- e. Enter the number to be dialed on the telephone keypad
- f. Press STOP
- g. Replace handset

4. Switchboard Telephone Line Programming

- a. Press and hold START
- b. Lift the telephone handset (while still holding down START)
- c. Release START
- d. Press START
- e. Dial the access code for an outside line (usually 8 or 9)
- f. Press PAUSE
- g. Enter the number to be dialed on the telephone keypad
- h. Press STOP
- i. Replace handset

The following steps must be performed to test if the programming was done correctly.


5. Test

- a. Wait 10 seconds; pick up the telephone handset to test for operation

6. Close-up

- a. Replace the Unidialer cover and mount the Unidialer

Courtesy

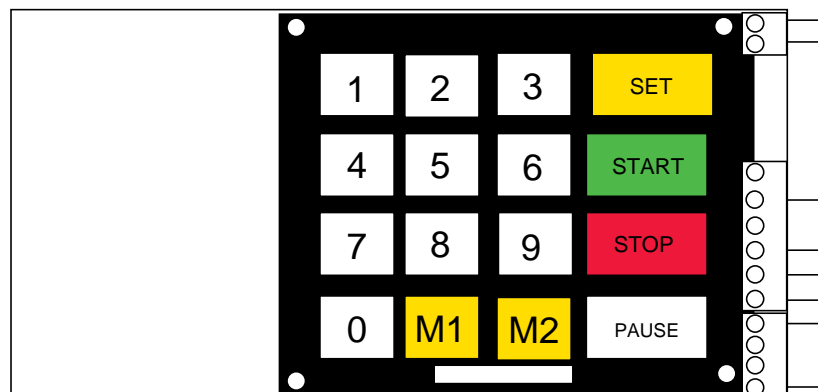

We're There for You!

TOLL FREE TECHNICAL SUPPORT 1-800-451-1460 EXT. 3



N56 W24720 N. Corporate Circle, P.O. Box 306 Sussex, Wisconsin 53089

800-451-1460 FAX 262-246-4828

Web site: www.rathmicrotech.com

Sales: info@rathmicrotech.com

Tech Support: help@rathmicrotech.com